


## Presses for assembly / curing of Sidewall Cleated Conveyor Belts

- Automatic cycle for continuous work with automatic conveyor movement
- Max conveyor width 1600 mm
- Electric heating divided in areas, with electronic modulation
- Adjustable and electronically controllable molding pressure
- Interchangeable pressure devices with possibility to configure number and position






The first station automatically hot-cures the sidewalls onto the base rubber conveyor belt

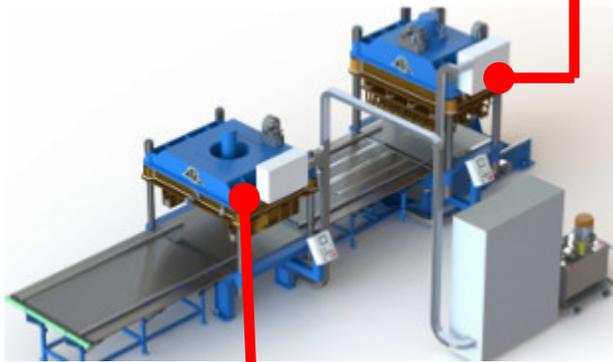

The second station automatically hot-cures the cleats onto the base rubber conveyor belt

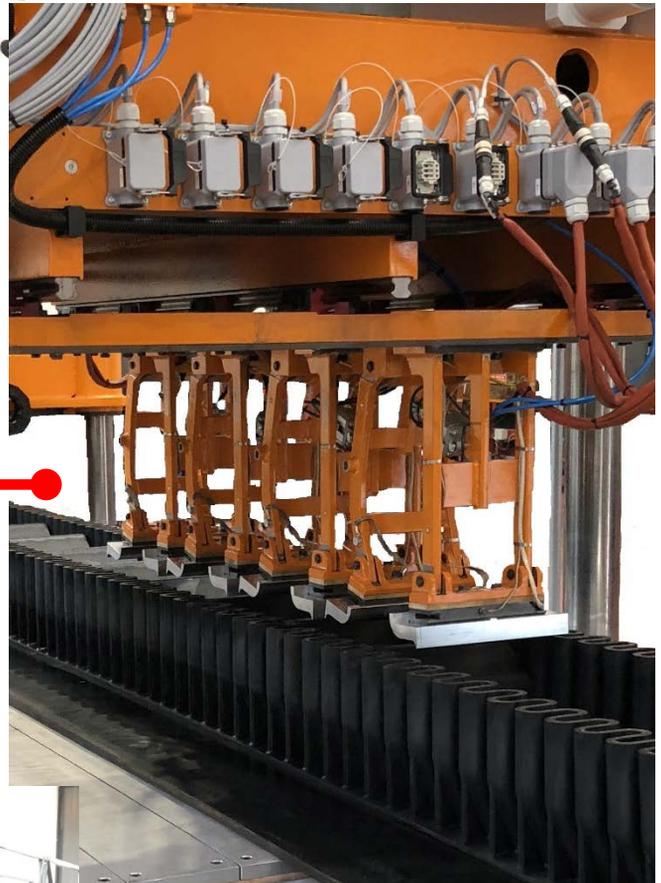

[www.cimaimpanti.com](http://www.cimaimpanti.com)